
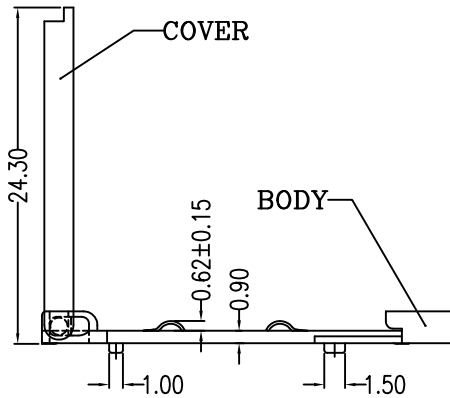


Material:

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: LCP UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin Plating on Solder Tail.

Specification:

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S For One Minute;
- 3.Insulation Resistance: 1000 M Ω Min. AT 500V AC;
- 4.Contact Resistance: 30 m Ω Max.;
- 5.Operating Temperature: -25°C to +85°C;
- 6.Durability: 5000 Cycles.
- 7.Processing Temp: 260°C for 30~60 Seconds Max

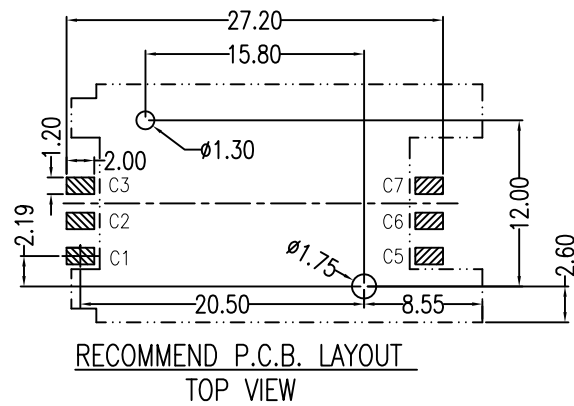

PRODUCT NUMBER:
115B-A A A Q-R
1 2 3 4 5

- 1.Type A:6 Pin
- 2.Contact Plating A:Gold Flash
- 3.Stand Off A:0mm
- 4.Peg 0:w/peg
- 5.RoHS

SIM CARD PINOUT	
PIN NO.	DESCRIPTION
C1	VCC
C2	RST CARD RESET (POTIONAL)
C3	CLK CARD CLOCK
C4	AS APPLICATION SPECIFIC
C5	GND GROUND
C6	VPP
C7	I/O IN/OUT
C8	AS APPLICATION SPECIFIC

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/08/03
CHECKED	Angel	2012/08/03
APPROVED	Ken	2012/08/03



www.attend.com.tw

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			4			A4	1,0	115B-AAA0-R_B_3

3	Revise:							
2	Revise:							
1	Revise: Processing Temp: 260°C							

DRAWN NAME:	SIM Card Socket Hinge Type
PRODUCT NO.	115B-AAA0-R
FILE NAME	115B-AAA0-R_B_3