

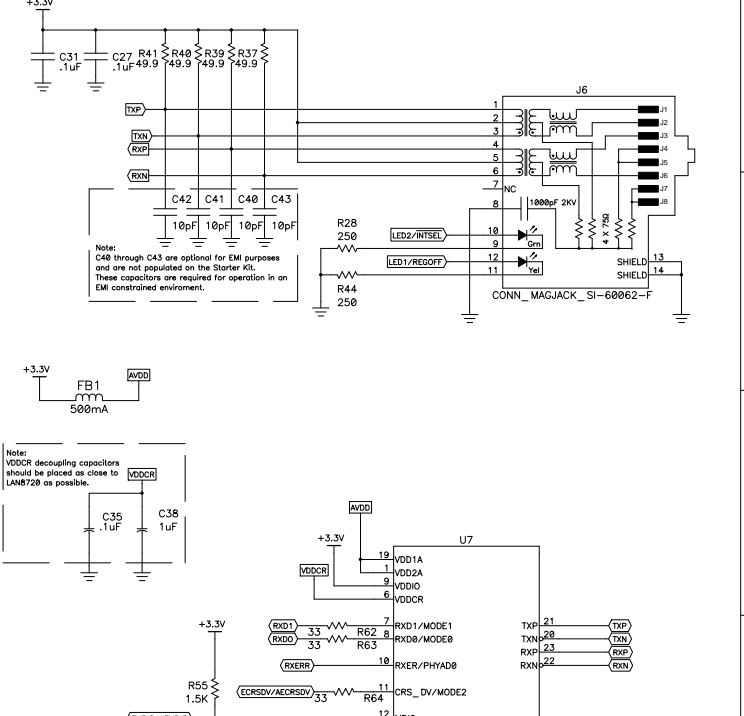
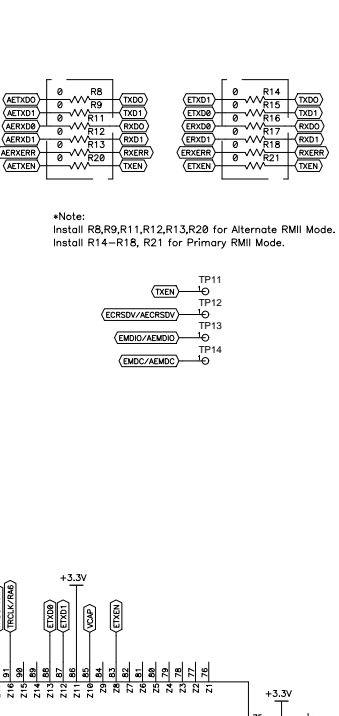
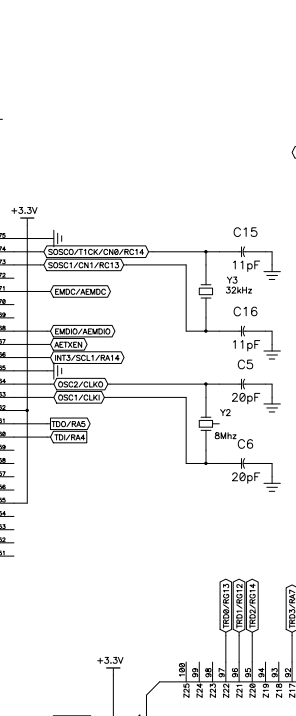
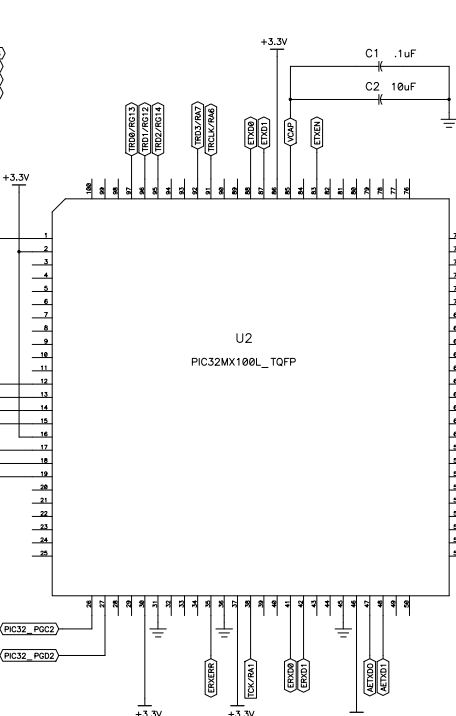



TRACE Header




ICD Connector



JTAG Connector



POWER

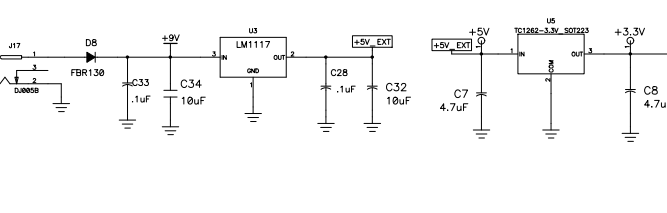

\*Note:  
Install R8,R9,R11,R12,R13,R20 for Alternate RMI Mode.  
Install R14-R18, R21 for Primary RMI Mode.

Note:  
C48 through C43 are optional for EMI purposes  
and are not populated on the Starter Kit.  
These capacitors are required for operation in an  
EMI constrained environment.

Note:  
VDDCR decoupling capacitors  
should be placed as close to  
LAN8720 as possible.

LED1 = LINK/ACT  
LED2 = BUS SPEED

Title PIC32MX ETN TEST BD.			
Size D	Number 03-90019	Rev. B	
Date 05/22/2009	Drawn by Chris C. Smith		Sheet 1 of 2
Filename 03-90019.SCH			